

# Impact Wrenches

Construction,  
Industrial & Automotive




## MI-3800PR

### INDUSTRIAL

- 2,100Nm Maximum torque output
- 1" Square drive
- Suitable for industrial & commercial vehicle applications
- Closed hammer impact mechanism for enhanced tool protection
- 4 Level power adjustment
- Ergonomic & well balanced
- Exhausts through integrated rotating silencer for increased operator comfort
- Vibration level 8m/s<sup>2</sup>

Type	MI-3800PR
Brand	TOKU
Square drive	1"
Type	Ring & Hole type
Bolt capacity mm	36
Impact mechanism	Closed Hammer
RPM	4,500
Torque Nm	2,100
Power adjustment	R/L 4 levels
Air cons. l/s	15.0
Weight kg	9.3
Inlet thread	PT 1/2"
Hose diameter mm	13
Vibration m/s <sup>2</sup>	8.0
Noise level dB(A)	84

### IMPACT MECHANISMS

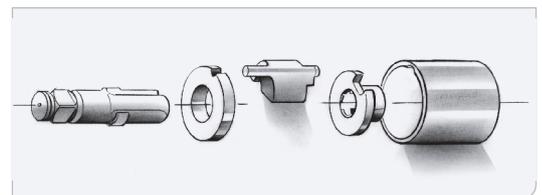


The closed hammer system is constructed, without a loose hammer pin to prevent breakage. The working principle is based on the 1-hammer system which makes 1 impact per rotation at both sides of the anvil.

This produces greater energy per blow.

Product Code	Time to reach ELV (hours:minutes)	Time to reach EAV (hours:minutes)
MI-3800PR	3.08	0.47

### TECHNICAL DATA

Type	A mm	A* mm	B mm
MI-3800PR	281		55



## REPAIR & SERVICE DEPARTMENT

From the Yokota UK service centre at our Sheffield head office we are able to offer you full service, repair & preventative maintenance.

- FREE no obligation quotations
- 3 month comprehensive warranty on all work carried out
- Fully traceable repair history through our quality management systems
- Only OEM spare parts used
- Complete maintenance advice service